



Screw Feeder

AUTOMATED FEEDING SYSTEMS FOR AQUACULTURE

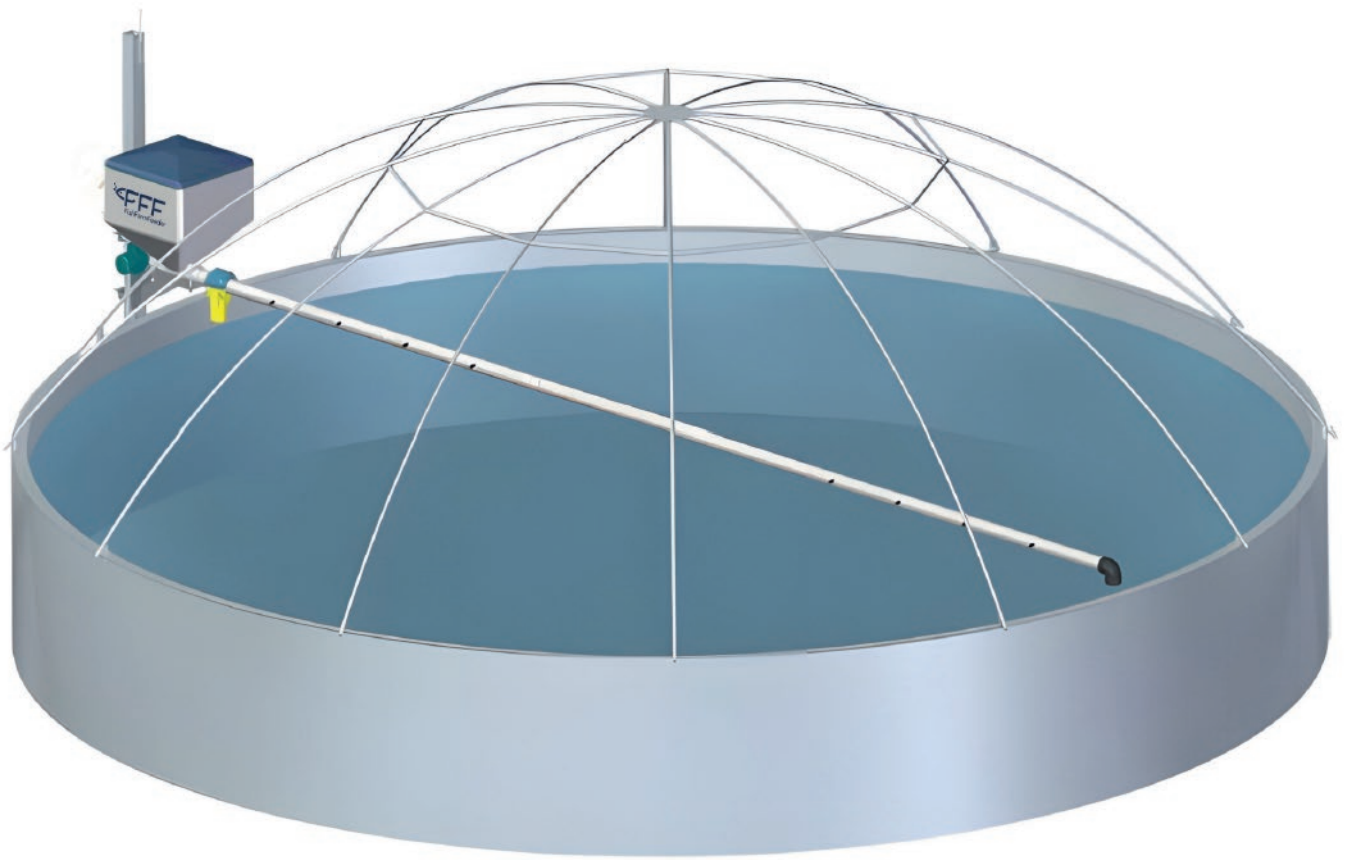


Diametrical Feeder

Up to 15 meters

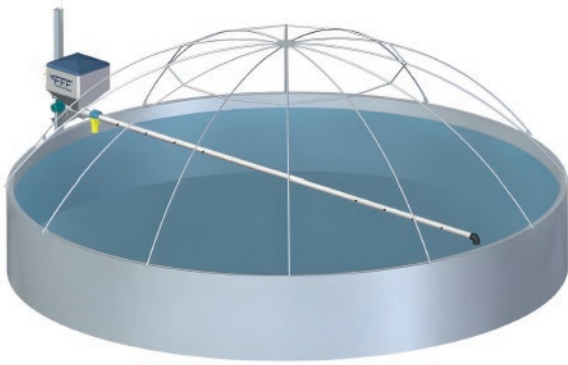

Radial Feeder

Up to 4 meters

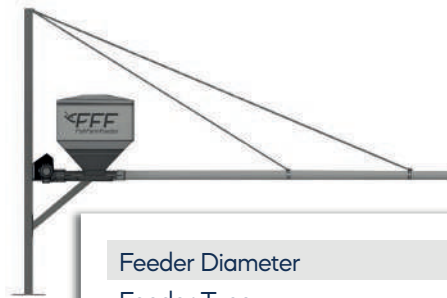


Feeder Diameter	Ø 50 mm
Feeder Type	Diametral and Radial
Pipe Length	from 3 to 15 m
Hopper Options in SS	50, 100, 150, 200, 250 l
Plastic Hoppers Options	150 and 250 l
Calibers	from 0.7 to 2 mm

Up&Down Feeder

It can be accommodated to the water mirror


Tube Length	1 m
Hopper Capacity	10 l
Calibers	from 0.7 to 2 mm
Calibration Rate	from 0.6 to 0.8 g/s
Installed Power (motor+control)	40 W + 100 W
Nominal Voltage	220 Vca, 50 Hz

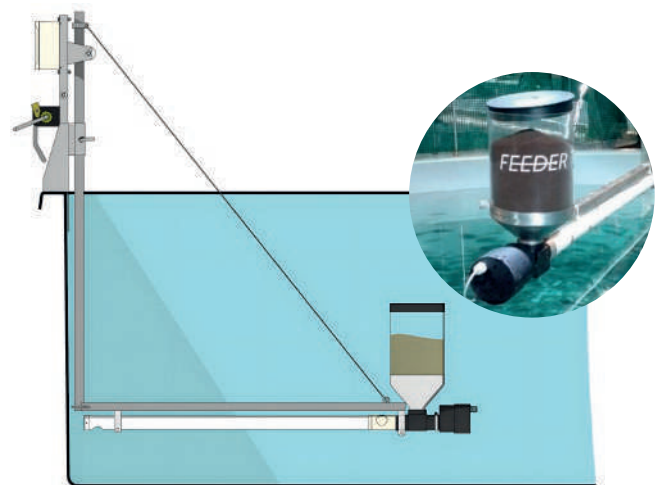

Feeder TK



Software where each tank is an independent unit (Station) and is connected to a central unit (Manager).

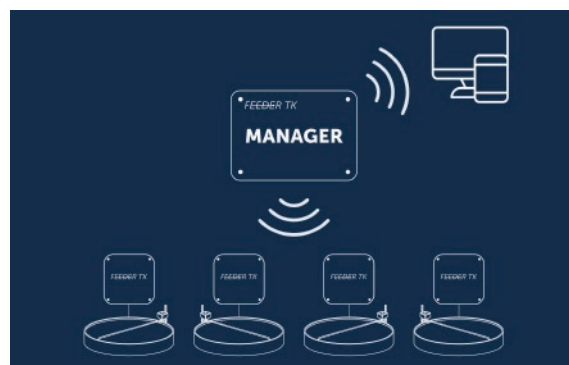

It is very simple to scale the number of connected and controlled tanks. Easy to maintain and replace control stations in case of failure (Plug & Play), without requiring the assistance of technical service.



Feeder TK is compatible with already installed equipment, so it can replace previous versions.



FEEDING SYSTEMS



Live feed

HATCHERIES

Pellet 50-800 μ
 \varnothing Pipe 20 mm



Dry feed



PRE-GROW

Pellet 1-4 mm
 \varnothing Pipe 25-40 mm



ONGROWING

Pellet 4-20 mm
 \varnothing Pipe 50-90 mm



EQUIPMENT



Propeller Pumps



Spreader



Immersion Vaccinator

